


INDEPENDENT TESTING RESULTS

Product Group: Vapor Lock™ 40/40

CORROSION POTENTIAL

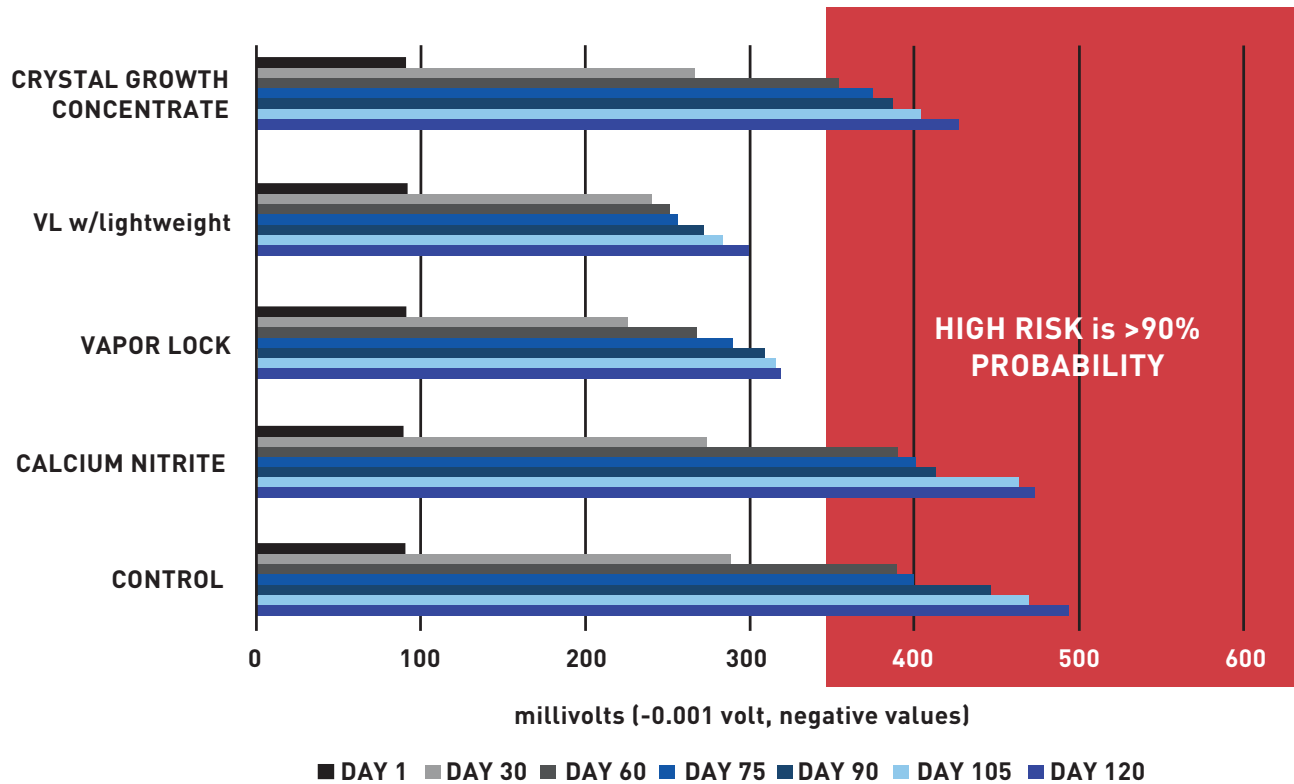

| ASTM Standards Tests and Results | | |
|----------------------------------|---|---------------------------------------|
| ASTM DESIGNATION | TITLE | RESULTS |
| C-494/C-494M | Standard Specification for Chemical Admixtures for Concrete | Pass |
| NSF-61 | Standard Approval Testing for use with Potable Drinking Water | Pass |
| C-39/C-39M | Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens | 2.1-.5% Increase over Control-28 days |
| C-78 | Standard Test Method for Flexural Strength of Concrete (Using Simple Beam with Third-Point Loading) | 4-1% Increase over Control-28 days |



INDEPENDENT TESTING RESULTS

Product Group: Vapor Lock™ 40/40

ASTM Standards Tests and Results

| ASTM DESIGNATION | TITLE | RESULTS |
|------------------|---|---|
| C-138/C-138M | Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete | 1% Decrease over control-28 days |
| C-143/C-143M | Standard Test Method for Slump of Hydraulic- Cement Concrete | 0% Change against Control |
| C-157/C-157M | Standard Test Method for Length Change of Hardened Hydraulic- Cement Mortar and Concrete | -0.021% Avg 3 Tests |
| C-231 | Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method | 0.3% Increase over Control |
| C-403/C-403M | Standard Test Method for Time of Setting of Concrete Mixtures by Penetration Resistance | Initial set Vapor Lock decreased setting time by 1 minute |
| C-403/C-403M | Standard Test Method for Time of Setting of Concrete Mixtures by Penetration Resistance | Final set Vapor Lock decreased setting time by 2 minutes |
| C-666/C-666M | Standard Test Method for Resistance of Concrete to Rapid Freezing and Thawing | 1.1% Improved Durability Factor over Control |
| D-5084 | Standard Test Methods for Measurement of Hydraulic Conductivity of Saturated Porous Materials Using a Flexible Wall Permeameter | 40% Increase Over other WVRA Products |
| D-5084 | Standard Test Methods for Measurement of Hydraulic Conductivity of Saturated Porous Materials Using a Flexible Wall Permeameter | 500% Increase over Crystalline Growth Admixture |
| D-5084 | Standard Test Methods for Measurement of Hydraulic Conductivity of Saturated Porous Materials Using a Flexible Wall Permeameter | 1,000% Increase Over Control |
| D-7102-06 | Standard Test Method for determining the adhesive and cohesive | Pass |



REPORT OF RESULTS FOR CONCRETE PERMEABILITY TESTING

Product: Vapor Lock Testing Program • TEC Services Project No: TEC • 16-1345 TEC Services Laboratory No: 17-124

Table 1 – Concrete Theoretical Mix Designs and Plastic Properties

| MATERIAL | MIX PROPORTIONS (LBS/YDS) | | |
|------------------------------|---------------------------|-------------------------|------------------|
| | 17—124-C (Control Mix) | 17-124-V (Vapor Lock) | 17-124-E (Other) |
| Lehigh Type I/II Cement | 611 | 611 | 611 |
| Vulcan – Lithonia Quarry #57 | 1,720 | 1,720 | 1,720 |
| Lambert Sand | 1,248 | 1,248 | 1,248 |
| Water | 324 | 321 | 320 |
| Total | 3,903 | 3,900 | 3,899 |
| Designed Air Content (%) | 2.0 | 2.0 | 2.0 |
| Designed Unit Weight (pcf) | 144.56 | 144.43 | 144.41 |
| ADMIXTURES | GS | ADMIXTURE DOSAGE | |
| Vapor Lock™ (oz/yd) | 1.085 | - | 61.1 |
| Other (oz/yd) | 0.7 | - | 64.6 |
| PLASTIC PROPERTIES | | | |
| Slump (inches) | 3½ | 4 | 4 |
| Unit Weight (pcf) | 146.5 | 145.5 | 145.5 |
| Air Content (%) | 0.7 | 1.3 | 1.2 |

Table 2 – Results Summary of CRD-C 48-92 Water Permeability Testing

| Specimen Set ID | 17-124-C (Control Mix) | 17-124-V (Vapor Lock) | 17-124-E (Other) |
|--|------------------------|-----------------------|------------------|
| Age at time of Testing (days) | 28 | 28 | 28 |
| Test Duration (days) | 28 | 28 | 28 |
| Diameter (in.) | 6.00 | 6.00 | 6.00 |
| Length (in.) | 6.00 | 6.00 | 6.00 |
| Flow Rate for Last 5 Days of Testing (ft ³ /sec) | 0.365 | 0.222 | 0.287 |
| Water Permeability (ft ³ /sec)/ft ² (ft head/ft) | 1.99E-11 | 1.21E-11 | 1.56E-11 |
| Total Change in Volume of Water based on Readings (cm ³) | 199.50 | 94.97 | 168.31 |
| Total Volume of Water Passed through Specimen (cm ³) | 0 | 0 | 0 |



REPORT OF RESULTS FOR CONCRETE PERMEABILITY TESTING

Product: Vapor Lock Testing Program • TEC Services Project No: TEC • 16-1345 TEC Services Laboratory No: 17-124

Table 3 – Results of CRD-C 48-92 Water Permeability Testing of the Control Mix

| Specimen Set ID | 17-124-C1 | 17-124-C2 | Average |
|--|-----------|-----------|-----------|
| Age at time of Testing (days) | 28 | 28 | 28 |
| Test Duration (days) | 28 | 28 | 28 |
| Diameter (in.) | 6.00 | 6.00 | 6.00 |
| Length (in.) | 6.00 | 6.00 | 6.00 |
| Flow Rate for Last 5 Days of Testing (ft ³ /sec) | 0.314 | 0.416 | 0.365 |
| Water Permeability (ft ³ /sec)/ft ² (ft head/ft) | 1.71 E-11 | 2.27 E-11 | 1.99 E-11 |
| Total Change in Volume of Water based on Readings (cm ³) | 119.81 | 279.19 | 199.50 |
| Total Volume of Water Passed through Specimen (cm ³) | 0 | 0 | 0 |

Table 4 – Results of CRD-C 48-92 Water Permeability Testing of the Vapor Lock

| Specimen Set ID | 17-124-V1 | 17-124-V2 | Average |
|--|-----------|-----------|-----------|
| Age at time of Testing (days) | 28 | 28 | 28 |
| Test Duration (days) | 28 | 28 | 28 |
| Diameter (in.) | 6.00 | 6.00 | 6.00 |
| Length (in.) | 6.00 | 6.00 | 6.00 |
| Flow Rate for Last 5 Days of Testing (ft ³ /sec) | 0.172 | 0.271 | 0.222 |
| Water Permeability (ft ³ /sec)/ft ² (ft head/ft) | 9.40 E-12 | 1.48 E-11 | 1.21 E-11 |
| Total Change in Volume of Water based on Readings (cm ³) | 74.05 | 115.89 | 94.97 |
| Total Volume of Water Passed through Specimen (cm ³) | 0 | 0 | 0 |



REPORT OF RESULTS FOR CONCRETE PERMEABILITY TESTING

Product: Vapor Lock Testing Program • TEC Services Project No: TEC • 16-1345 TEC Services Laboratory No: 17-124

Table 5 – Results of CRD-C 48-92 Water Permeability Testing of the Other Mix

| Specimen Set ID | 17-124-E1 | 17-124-E2 | Average |
|--|-----------|-----------|-----------|
| Age at time of Testing (days) | 28 | 28 | 28 |
| Test Duration (days) | 28 | 28 | 28 |
| Diameter (in.) | 6.00 | 6.00 | 6.00 |
| Length (in.) | 6.00 | 6.00 | 6.00 |
| Flow Rate for Last 5 Days of Testing (ft ³ /sec) | 0.348 | 0.225 | 0.287 |
| Water Permeability (ft ³ /sec)/ft ² (ft head/ft) | 1.90 E-11 | 1.23 E-11 | 1.56 E-11 |
| Total Change in Volume of Water based on Readings (cm ³) | 238.83 | 97.79 | 168.31 |
| Total Volume of Water Passed through Specimen (cm ³) | 0 | 0 | 0 |



REPORT FOR VAPOR LOCK ASTM C441 TESTING TEC SERVICES

Project No: TEC 16-1345 • TEC Services Laboratory No: 17-124

Table 1 – C441 Mix Proportions

| MATERIAL | CONTROL | VAPOR LOCK |
|--------------------|---------|------------|
| Buzzi Cement | 400 | 400 |
| Vapor Lock | 0 | 0.26 |
| Graded Pyrex Glass | 900 | 900 |
| Water | 217 | 218 |
| Flow (100-115%) | 103 | 100 |

Table 2 – Expansion Due to ASR Test Results (%)


| | LENGTH (INCHES) | | LENGTH CHANGE (%) |
|--|-----------------|---------|-------------------|
| | INITIAL | 14 DAYS | |
| Control 1 | 0.0536 | 0.0576 | 0.044 |
| Control 2 | 0.0640 | 0.0678 | 0.042 |
| Control 3 | 0.0655 | 0.0679 | 0.028 |
| AVERAGE | | | 0.038 |
| 17-124-IVL | 0.0724 | 0.0740 | 0.020 |
| I 7-124-2VL | 0.0665 | 0.0677 | 0.016 |
| 17-124-3VL | 0.0600 | 0.0614 | 0.018 |
| Reference | 0.0438 | 0.0434 | --- |
| AVERAGE | | | 0.01 |
| REDUCTION OF MORTAR EXPANSION AS % OF CONTROL | | | 52.6 |



REPORT FOR VAPOR LOCK ASTM C441 TESTING TEC SERVICES

Project No: TEC 16-1345 • TEC Services Laboratory No: 17-124

Expansion Due to ASR

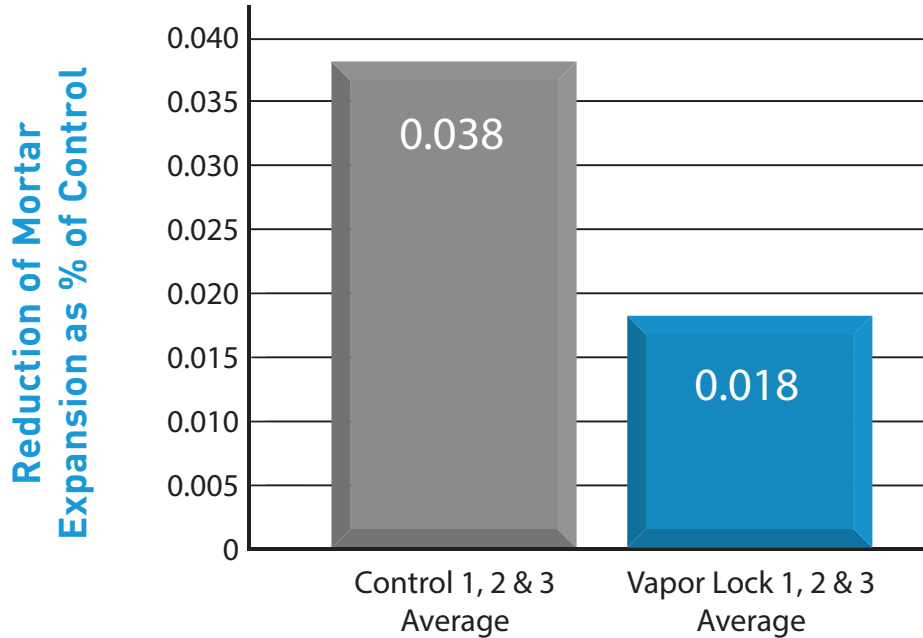

RAPID CHLORIDE PERMEABILITY IN ACCORDANCE WITH CARBONATE SILICATE (CSA) A23.2-23C STANDARD TEST METHOD FOR ELECTRICAL INDICATION OF CONCRETE'S ABILITY TO RESIST CHLORIDE ION PENETRATION

Test Results are provided in the table below

| CONCRETE MIX INFORMATION | | | | | | | Charge Passed in 6 hours (coulombs) | Age at Test (days) |
|--------------------------|----------|-----------|-----------------------|-----------------|------------|-------------|-------------------------------------|--------------------|
| ID NO. | MIX CODE | DATE CAST | DESIGN STRENGTH (MPA) | AIR CONTENT (%) | SLUMP (MM) | CEMENT TYPE | | |
| 2421 | 612401 | Fe 1 | 35 | 5.8 | 85 | GU | 1045 | 68 |
| 2422 | | 7/16 | | | | | 1071 | 91 |

| | 07/02/16 | 07/09/16 | 07/16/16 | 07/23/16 |
|-----------------------------|----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Mix Design | Ave. 7 days in Air Storage | Ave. 14 days in Air Storage | Ave. 21 days in Air Storage | Ave. 28 days in Air Storage |
| RRM0938 with Vapor Lock™ | 0.010% | 0.017% | 0.019% | 0.029% |
| RRM0938 with no Vapor Lock™ | 0.013% | 0.024% | 0.029% | 0.037% |




REPORT FOR VAPOR LOCK ASTM C441 TESTING TEC SERVICES

Project No: TEC 16-1345 • TEC Services Laboratory No: 17-124

D5084 Testing

| SAMPLE LOCATION | SAMPLE DESCRIPTION | MIX DESIGN |
|---------------------------|-----------------------------------|------------|
| Roof Level Suspended Slab | Concrete cylinder with Vapor Lock | V6000PT2 |

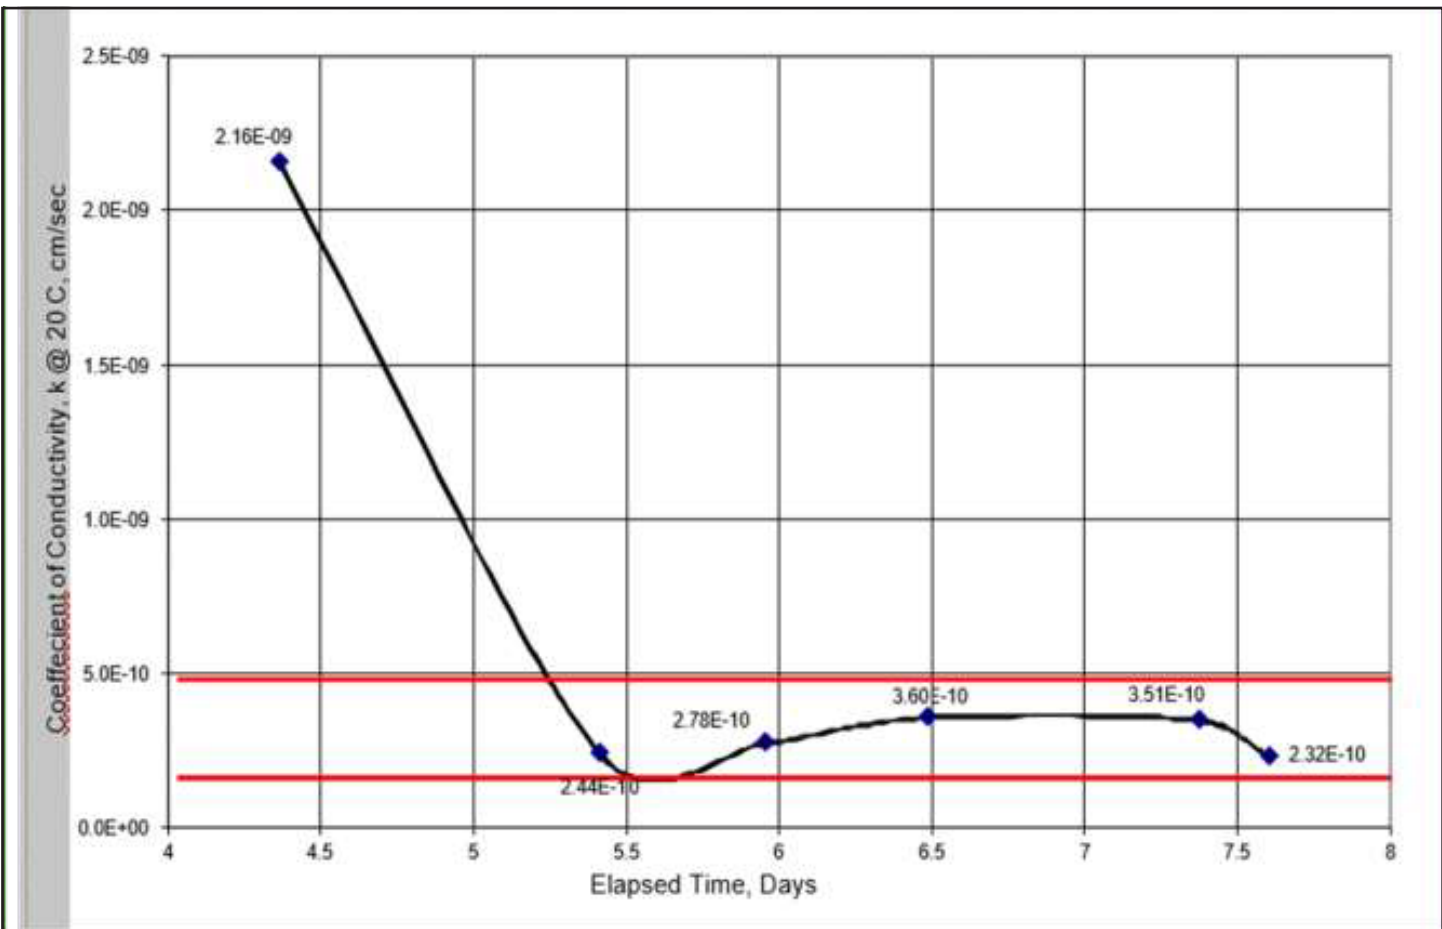


| Sample Preparation | | Test Conditions | | Coefficient of Conductivity, k@20C, cm/sec |
|---------------------|-------|------------------------|-------|---|
| SSD Density (pcf) | 150.0 | Cell Pressure (psi) | 115.0 | Average of last 4 test cycles 0.000000000320 3.20E-10 |
| Diameter (in.) | 4.004 | Back Pressure (psi) | 95.0 | |
| Sample Height (in.) | 2.048 | B-value: | 0.95 | |
| | | Consol. stress (psi) | 20.0 | |
| | | Hydraulic Gradient | 143.8 | |
| | | Pressure Head (psi) | 10.0 | |
| | | Start temperature (°C) | 21.1 | |
| | | End temperature (°C) | 21.7 | |


REPORT FOR VAPOR LOCK ASTM C441 TESTING TEC SERVICES

Project No: TEC 16-1345 • TEC Services Laboratory No: 17-124

Shrinkage compared with SRA & Vapor Lock™ shows an average 27% decrease in shrinkage when using Vapor Lock™

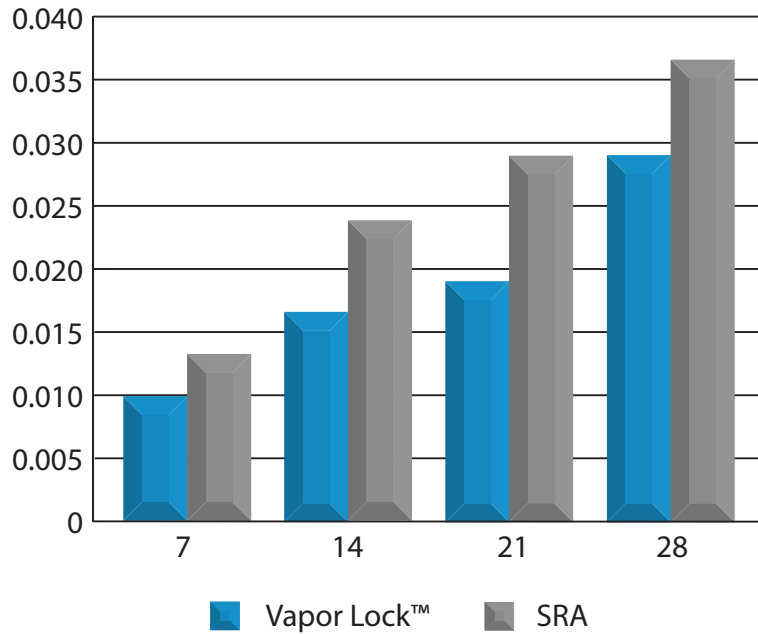

Strength testing shows Vapor Lock™ increased strength by an average 4%

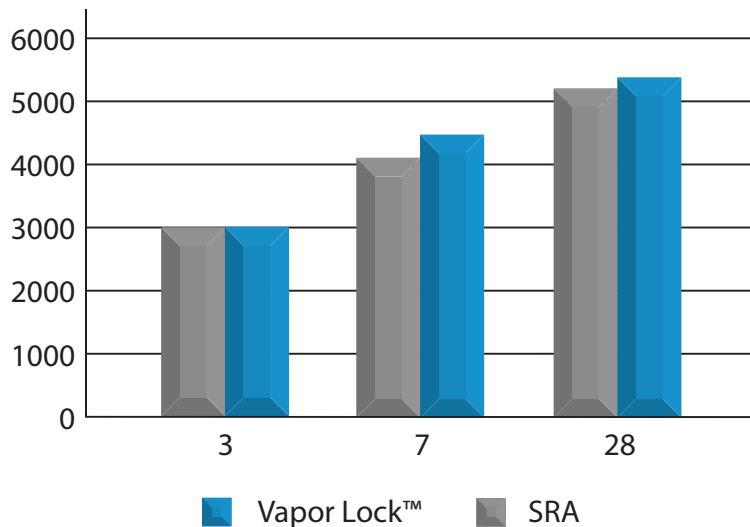





REPORT FOR VAPOR LOCK ASTM C441 TESTING TEC SERVICES

Project No: TEC 16-1345 • TEC Services Laboratory No: 17-124

D5084 Test Results

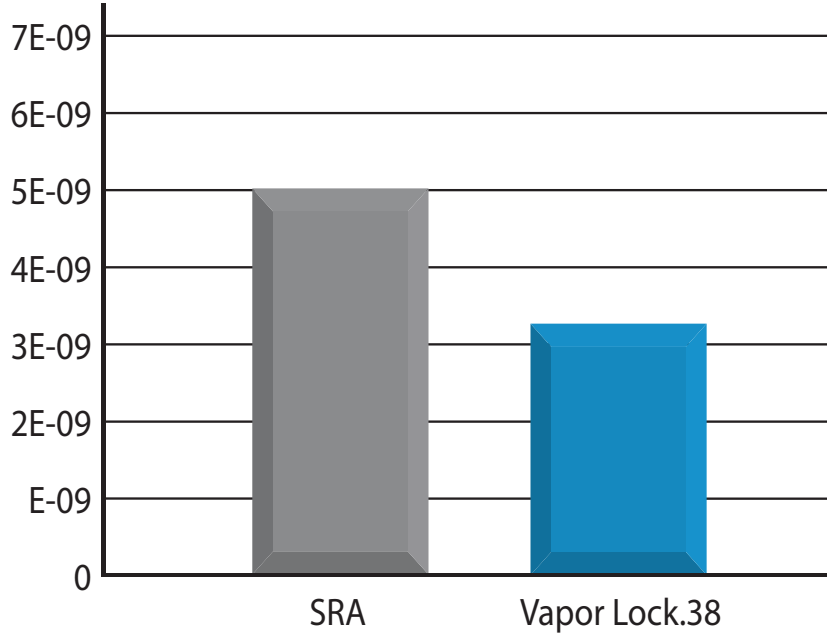

Radon Concentration in Receiving Compartment

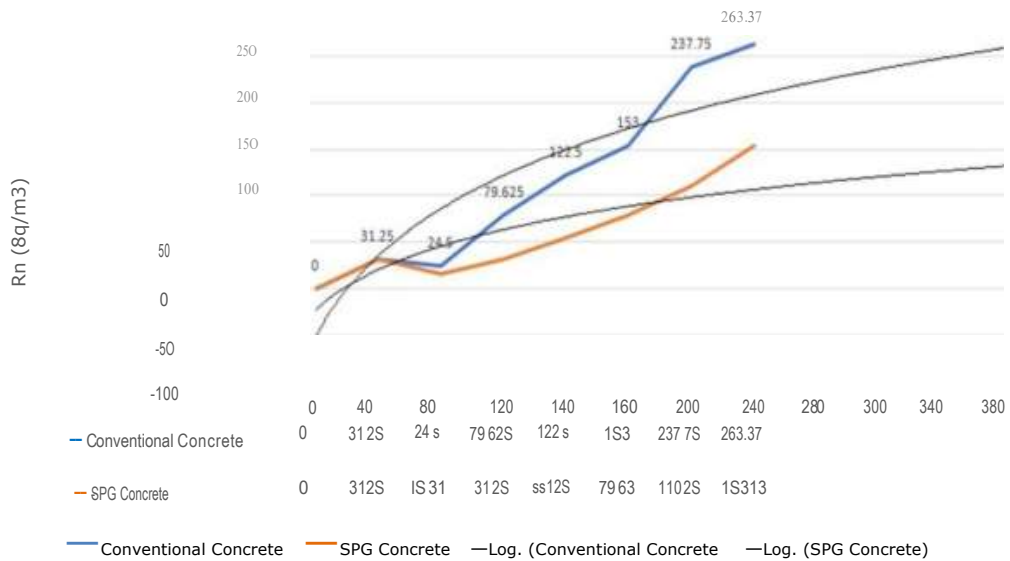

| | 0 | 40 | 80 | 120 | 140 | 160 | 200 | 240 | 280 | 300 | 340 | 380 |
|-----------------------|---|-------|--------|-------|-----|--------|--------|-----|-----|-----|-----|-----|
| Conventional Concrete | 0 | 31.25 | 79.625 | 122.5 | 153 | 237.75 | 263.37 | | | | | |
| SPG Concrete | 0 | 24 | | | | | | | | | | |